







## **OPTIONS**












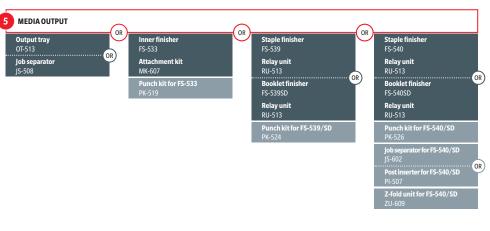



# **FINISHING FUNCTIONALITIES**





























stapling stapling

punching

punching

Duplex

mixplex/ mixmedia

Half-fold

insertion

Booklet

Offset sorting Z-fold

printing

Stapling (offline)

# **DESCRIPTION**

ENHANCED FEATURES	
LK-105v4 OCR text recognition	Searchable PDF and PPTX
LK-106 Barcode fonts	Supports native barcode printing
LK-107 Unicode fonts	Supports native Unicode printing
LK-108 OCR A and B fonts	Supports native OCR A and B font printing
LK-110v2 Document converter pack	Generates various file formats incl. DOCX, XLSX and PDF/A
LK-111 ThinPrint® client	Print data compression for reduced network impact
LK-114 Serverless pull printing	Secure and Follow Me printing solution requiring no server application
LK-115v2 Trusted Platform Module	Trusted Platform Module for protection of data encryption
	and decryption
LK-116 Antivirus	Bitdefender® antivirus provides real time scanning of all
	incoming and outgoing data
LK-117 FOIP activation	Fax over IP networks (T.38), requires fax kit
CONNECTIVITY	
FK-514 Fax board	Super G3 fax, digital fax functioality
FK-514 Fax board UK-221 Wireless LAN	Super G3 fax, digital fax functioality  Wireless LAN and wireless LAN Access Point Mode
UK-221 Wireless LAN	Wireless LAN and wireless LAN Access Point Mode
UK-221 Wireless LAN EK-608 USB I/F kit	Wireless LAN and wireless LAN Access Point Mode USB keyboard connection
UK-221 Wireless LAN EK-608 USB I/F kit EK-609 USB I/F kit	Wireless LAN and wireless LAN Access Point Mode  USB keyboard connection  USB keyboard connection; Bluetooth
UK-221 Wireless LAN EK-608 USB I/F kit EK-609 USB I/F kit AU-102 Biometric authentication	Wireless LAN and wireless LAN Access Point Mode  USB keyboard connection  USB keyboard connection; Bluetooth  Finger vein scanner
UK-221 Wireless LAN EK-608 USB I/F kit EK-609 USB I/F kit AU-102 Biometric authentication ID card reader	Wireless LAN and wireless LAN Access Point Mode  USB keyboard connection; USB keyboard connection; Bluetooth  Finger vein scanner  Various ID card technologies
UK-221 Wireless LAN EK-608 USB I/F kit EK-609 USB I/F kit AU-102 Biometric authentication ID card reader	Wireless LAN and wireless LAN Access Point Mode  USB keyboard connection; USB keyboard connection; Bluetooth  Finger vein scanner  Various ID card technologies
UK-221 Wireless LAN EK-608 USB I/F kit EK-609 USB I/F kit AU-102 Biometric authentication ID card reader MK-735 Mount kit	Wireless LAN and wireless LAN Access Point Mode  USB keyboard connection; USB keyboard connection; Bluetooth  Finger vein scanner  Various ID card technologies
UK-221 Wireless LAN  EK-608 USB I/F kit  EK-609 USB I/F kit  AU-102 Biometric authentication  ID card reader  MK-735 Mount kit  OTHERS	Wireless LAN and wireless LAN Access Point Mode  USB keyboard connection  USB keyboard connection; Bluetooth  Finger vein scanner  Various ID card technologies  Installation kit for ID card reader
UK-221 Wireless LAN  EK-608 USB I/F kit  EK-609 USB I/F kit  AU-102 Biometric authentication ID card reader  MK-735 Mount kit  OTHERS  WT-506 Working table	Wireless LAN and wireless LAN Access Point Mode  USB keyboard connection  USB keyboard connection; Bluetooth  Finger vein scanner  Various ID card technologies  Installation kit for ID card reader  Authentication device placement
UK-221 Wireless LAN EK-608 USB I/F kit EK-609 USB I/F kit AU-102 Biometric authentication ID card reader MK-735 Mount kit  OTHERS WT-506 Working table FS-P04 Offline Stapler	Wireless LAN and wireless LAN Access Point Mode  USB keyboard connection  USB keyboard connection; Bluetooth  Finger vein scanner  Various ID card technologies  Installation kit for ID card reader  Authentication device placement  Offline stapler, 20 sheets stapling
UK-221 Wireless LAN EK-608 USB I/F kit EK-609 USB I/F kit AU-102 Biometric authentication ID card reader MK-735 Mount kit  OTHERS WT-506 Working table FS-P04 Offline Stapler KP-102 10-Key pad	Wireless LAN and wireless LAN Access Point Mode  USB keyboard connection  USB keyboard connection; Bluetooth  Finger vein scanner  Various ID card technologies  Installation kit for ID card reader  Authentication device placement  Offline stapler, 20 sheets stapling  For use instead of touchscreen

MEDIA INPUT	
IM-103 Intelligent media sensor	Autodetects paper weight and type
PC-116 1x Universal tray	500 sheets, A5-A3, 52-256 g/m <sup>2</sup>
PC-216 2x Universal tray	2x 500 sheets, A5-A3, 52-256 g/m <sup>2</sup>
PC-416 Large capacity tray	2,500 sheets, A4, 52-256 g/m <sup>2</sup>
PC-417 Large capacity tray	1,500 + 1,000 sheets, A5-A4, 52-256 g/m <sup>2</sup>
DK-516x Copier desk	Provides storage space for print media and other materials
LU-302 Large capacity tray	3,000 sheets, A4, 52-256 g/m <sup>2</sup>
LU-207 Large capacity tray	2,500 sheets, A4–SRA3, 52–256 g/m²
BT-C1e Banner tray	Multipage banner feeding
MEDIA OUTPUT	
OT-513 Output tray	Output tray used instead of finisher
JS-508 Job separator	Separation of fax output; etc.
FS-533 Inner finisher	50-sheet stapling, 500 sheets max. output
MK-607 Attachment kit	For FS-533 installation
PK-519 Punch kit for FS-533	2/4 hole punching, autoswitching
FS-539 Staple finisher	50 sheets stapling; 3,200 sheets max. output
FS-539SD Booklet finisher	50 sheets stapling; 20 sheets booklet finisher;
	2,200 sheets max. output
PK-524 Punch kit for FS-539/SD	2/4 hole punching; autoswitching
FS-540 Staple finisher	100 sheets stapling; 3,200 sheets max. output
FS-540SD Booklet finisher	100 sheets stapling; 20 sheets booklet finisher;
	2,700 sheets max. output
PK-526 Punch kit for FS-540/SD	2/4 hole punching; autoswitching
RU-513 Relay unit	For FS-539/SD or FS-540/SD installation
JS-602 Job separator for FS-540/SD	Separation of fax output; etc.
PI-507 Post inserter for FS-540/SD	Cover insertion; post finishing

Z-fold for A3 prints

# **TECHNICAL SPECIFICATIONS**

## SYSTEM SPECIFICATIONS

System speed A4	Up to 45 ppm
System speed A3	Up to 22 ppm
Autoduplex speed A4	Up to 45 ppm
1st page out time A4	3.8 sec.
Warm-up time	Approx. 12 sec. <sup>1</sup>
Imaging technology	Laser
Toner technology	Polymerised toner
Panel size/resolution	10.1" / 1024 x 600
System memory	8,192 MB (standard/max)
System hard drive	256 GB SSD (standard) / 1 TB SSD (optional)
Interface	10/100/1,000-Base-T Ethernet; USB 2.0;
	Wi-Fi 802.11 b/g/n/ac (optional)
Network protocols	TCP/IP (IPv4 / IPv6); SMB; LPD; IPP; SNMP; HTTP(S); Bonjour
Automatic document feeder	Up to 300 originals; A6-A3; 35-210 g/m²; Dualscan ADF
ADF double feed detection	Standard
Printable paper size	A6-SRA3; customized paper sizes;
	banner paper max. 1,200 x 297 mm
Printable paper weight	52-300 g/m <sup>2</sup>
Paper input capacity	1,150 sheets / 6,650 sheets (standard/max)
Paper tray input (standard)	1x 500; A6-A3; custom sizes; 52-256 g/m²
	1x 500; A5-SRA3; custom sizes; 52-256 g/m²
Paper tray input (optional)	1x 500 sheets; A5-A3; 52-256 g/m²
	2x 500 sheets; A5-A3; 52-256 g/m <sup>2</sup>

1x 2,500 sheets; A4; 52-256 g/m² 1x 1,500 + 1x 1,000 sheets; A5-A4; 52-256 g/m<sup>2</sup>

# SYSTEM SPECIFICATIONS

ZU-609 Z-fold unit for FS-540/SD

Large capacity tray (optional)	1x 3,000; A4; 52-256 g/m²
	1x 2,500; A4-SRA3; custom sizes; 52-256 g/m <sup>2</sup>
Manual bypass	150 sheets; A6-SRA3; custom sizes; banner; 60-300 g/m²
Finishing modes (optional)	Offset; Group; Sort; Staple; Staple (offline); Punch; Half-fold; Letter-
	fold; Booklet; Post insertion; Z-fold
Automatic duplexing	A6-SRA3; 52-256 g/m <sup>2</sup>
Output capacity	Up to 250 sheets / up to 3,300 sheets (standard/max)
Stapling	Max. 100 sheets or 98 sheets + 2 cover sheets (up to 300 g/m²)
Stapling output capacity	Max. 200 sets
Letter fold	Max. 3 sheets
Letter fold capacity	Max. 50 sets; unlimited (without tray)
Booklet	Max. 20 sheets or 19 sheets + 1 cover sheet (up to 300 g/m²)
Booklet output capacity	Max. 35 booklets; unlimited (without tray)
Duty cycle (monthly)	Rec. 40,000 pages; Max. <sup>2</sup> 200,000 pages
Toner lifetime	Black up to 24,000 pages
Imaging unit lifetime	Black up to 260,000/1,000,000 pages (drum/developer)
Power consumption	220-240 V / 50/60 Hz; Less than 1.58 kW
System dimension (W x D x H)	615 x 688 x 961 mm (without options)
System weight	Approx. 98.0 kg (without options)



#### PRINTER SPECIFICATIONS

Print resolution	1,800 (equivalent) x 600 dpi; 1200 x 1200 dpi
Page description language	PCL 6 (XL3.0); PCL 5c; PostScript 3 (CPSI 3016); XPS
Operating systems	Windows 10 (32/64); Windows 11; Windows Server 2012; Windows
	Server 2012 R2; Windows Server 2016;
	Windows Server 2019; Windows Server 2022;
	macOS 10.14 or later; Unix; Linux; Citrix
Printer fonts	80 PCL Latin; 137 PostScript 3 Emulation Latin
Mobile printing	AirPrint (iOS); Mopria (Android); optional: WiFi Direct

Scan speed	Up to 140/140 ipm in simplex (mono/colour)
scan speed	Up to 140/140 ipm in simplex (mono/colour)
	Up to 280/280 ipm in duplex (mono/colour)
Scan resolution	Up to 600 x 600 dpi
Scan modes	Scan-to-eMail (Scan-to-Me); Scan-to-SMB (Scan-to-Home);
	Scan-to-FTP; Scan-to-Box; Scan-to-USB; Scan-to-WebDAV;
	Scan-to-DPWS; Scan-to-URL; TWAIN scan
File formats	JPEG; TIFF; PDF; Compact PDF; Encrypted PDF; XPS; Compact XPS;
	PPTX; PDF/A 1a and 1b
	optional: Searchable PDF; Searchable DOCX/PPTX/XLSX
Scan destinations	2,000 destinations + 100 groups; LDAP support

#### **COPIER SPECIFICATIONS**

Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1-9,999
Original format	Max. A3
Magnification	25-400% in 0.1% steps: Auto-zooming

### FAX SPECIFCIATION

Fax standard	Super G3 (optional)	
Fax transmission	Analogue; i-Fax; Colour i-Fax; IP-Fax	
Fax resolution	Up to 600 x 600 dpi	
Fax compression	MH; MR; MMR; JBIG	
Fax modem	Up to 33.6 Kbps	
Fax destinations	2,000 single + 100 groups	

## LICED DOV CDECIFICATIONS

USER BOX SPECIFICATIONS	
Storable documents	Up to 3,000 documents or 10,000 pages
Type of user boxes	Public; Personal (with password or authentication);
	Group (with authentication)
Type of system boxes	Secure print; Encrypted PDF print; Fax receipt; Fax polling

#### SYSTEM FEATURES

SISILMITERIORES	
Security	ISO15408 Common Criteria (in evaluation);
	IP filtering and port blocking;
	SSL3 and TLS1.1/1.2/1.3 network communication; IPsec support; IEEE
	802.1x support; User authentication; Authentication log; Secure print;
	Kerberos; Hard drive overwrite;
	Hard drive data encryption (AES 256); Confidential fax;
	Print user data encryption
	optional: Antivirus realtime scanning (Bitdefender®);
	Copy protection (Copy Guard, Password Copy)
Accounting	Up to 1,000 user accounts; Active Directory support (user name +
	password + e-mail + smb folder); User function access definition;
	Authentication by mobile device (Android)
	optional: Biometric authentication (finger vein scanner);
	ID card authentication (ID card reader);
	Authentication by mobile device (iOS)
Software	Data Administrator; Web Connection; HDD Backup Utility;
	Driver Packaging Utility; Log Management Utility;
	Font Management Utility; Download Manager

 $<sup>^{\</sup>rm 1}\,\mbox{Warm-up}$  time may vary depending on the operating environment and usage

- All specifications refer to A4-size paper of 80 g/m² quality.
   The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.

  - The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a
- particular page size (6% coverage of A4). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and
- Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.







 $<sup>^{\</sup>mathrm{2}}$  If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed